



LIGHTING THE WAY FOR SIXTY YEARS


ASSEMBLY INSTRUCTION MODEL #SIL-B6003-BS_CEILING

Hanging

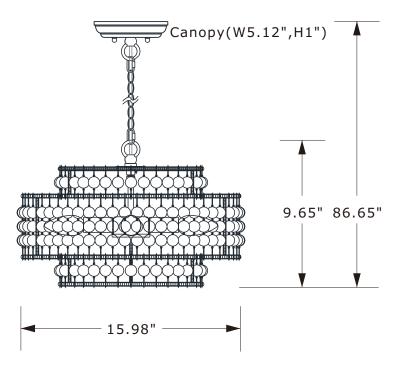

Ceiling

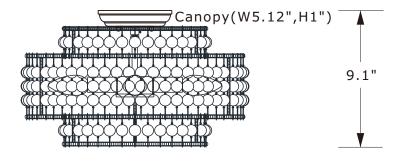



All electrical components must be

installed by a licensed electrician

in accordance with the National

Electric Code and the appropriate

local electrical codes.





You will need 4-Candelabra Base Bulb 40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

This fixture is DAMP rated

How to install

For hanging:


- 1. Screw the loop onto the top of fixture.
- 2.Insert recommended bulb (not included).

For ceiling:

- 1. Insert recommended bulb (not included).
- 2. Remove the loop and threaded pipe at the bottom of the canopy by unscrewing the hex nut on the inner side of the canopy.
- 3. Remove the mounting plate by unscrewing the 2 ball nuts at the bottom of the canopy.
- 4. Attach the canopy onto the top of the fixture and secure it with a hex nut.



PART NUMBER MODEL #SIL-B6003-BS_CEILING

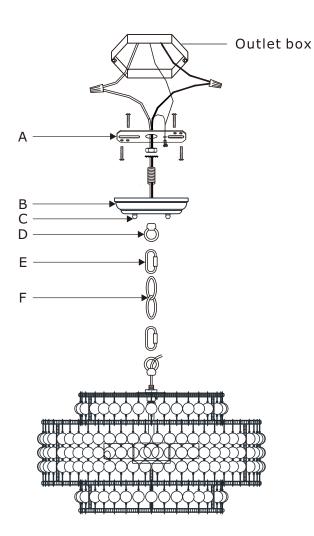

Part Number

- A. (1) Mounting Hardware
- B. (1) Canopy(W5.12",H1") #XRE6003BSCAN5.12IN
- C. (2) Ball Nut #XRE6003BSBANUT
- D. (2) Fixture Loop
- E. (2) Quick Link
- F. (1) Hanging Chain(72",4mm) #XRE6003BSCHA4MM