CRYST RAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#RAM-A3403-VG



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate

local electrical codes.





You will need 3- Medium Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

How to install

- 1. Place the mounting plate over the outlet box. Mark two points on the wall at the center of keyhole on the mounting plate.
- 2. Drill two holes at the marked points and insert the wall anchors.
- 3. Place the mounting plate over the outlet box and secure it with outlet box screws. Insert the anchor screws inside the wall anchor inside the wall and tighten it.
- 4. Install backplate onto the mounting plate, and secure with the screws.
- 5. Thread the nipple into the bottom of socket. Slide the crystal over the nipple, then secure it with the finial.
- $\boldsymbol{\delta}.$ Place the glass shade over the socket, and secure with the socket ring.
- 7. Install the bulb(not included) into socket.



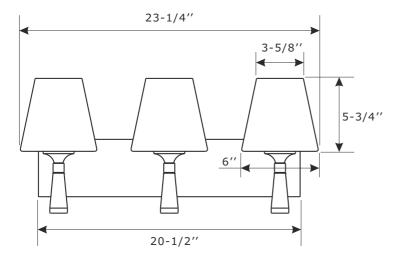



SIDE VIEW

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYST RAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#RAM-A3403-VG

Part Number

- Part Numbers
- A. (1)-Mounting hardware
- B. (1)-Mounting plate
- C. (1)-Backplate L20-1/2"xW4-1/2"xD3/4" #XRF3403VGBKP20.5IN
- D. (4)-Screw
- E. (3)-Finial #XRF3401VGFIN
- F. (3)-Crystal #XRF3401BOTCRY
- G. (3)-Nipple
- H. (3)-Socket
- I. (3)-Glass shade #XRF3401SHA6IN
- J. (3)-Socket ring

