


LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#PKR-B8506-BF

5-7/8"

ROD 1

ROD 2





7/8



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.





You will need 6-Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE

This fixture is Damp rated

How to install

- Determine the preferred hanging height and adjust to the required rods.
- 2. Feed the wires through the rods and connect them together.
- 3. Slip collar ring and canopy over the rod assembly.
- 4. Slip mounting strap with swivel along wire and thread it into the top of the rod assembly.
- Raise fixture up and attach mounting strap to the outlet box using two outlet box screws.
- 6. Slip canopy up along rods and over mounting strap with swivel and hold in it position. Slip collar ring up to canopy and thread it onto screw collar, to secure canopy.
- 7. Install the bulb(not included) into socket.
- 8. To install glass shade, pinch spring clip together and slip ends of clips into hole in bottom of glass shade.
- 9. Slowly release clips and slip glass shade down into position on glass holder.

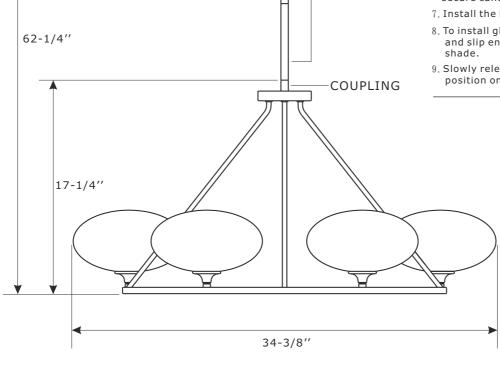



HOW TO REPLACE THE BULB

- 1. Gently lift the glass up to expose the clip. $\,$
- Pinch the clip together and continue to slowly lift the shade up until the glass is completely out, please handle with care to prevent the glass from breaking.



LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#PKR-B8506-BF

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5-7/8"xH7/8" #XRF8501BFCANH
- C. (1)-Collar ring
- D. (1)-Rod D5/8"xL6" #XRF8501BFROD6IN
- E. (3)-Rod D5/8"xL12" #XRF8501BFROD12IN
- F. (1)-Coupling
- G. (6)-Clip
- H. (6)-Socket
- I. (6)-Glass shade #XRF8504GLA9IN

