

CRYST®



LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #DEL90806AG

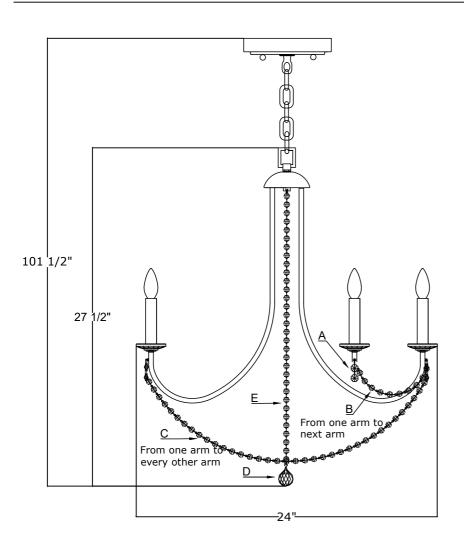

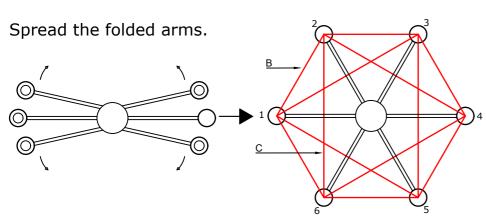



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate

local electrical codes,




You will need 6- Candelabra Base Bulb 40 Watts recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE The fixture is Dry rated

HOW TO INSTALL:

Place the fixture parts on a soft cloth-covered platform before installation of fixture.

- 1. Install the mounting bar onto the outlet box.
- 2. Decide the desired hanging height and adjust the chain to the correct length.
- 3. Spread the arms out equally. Place the check ring on the top of fixture body and secure with the fixture loop.
- 4. Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
- 5. Dress the crystals as illustrated.

Dress Crystal Strands C in the following sequence:



Crystal Sets

A. 6 Sets. (2)14mm

B. 6 Sets. 300mm long bead string--(10mm bead*19pcs) C. 6 Sets. 590mm long bead string--(10mm bead*37pcs)

D. 1 Piece. (1)AS8-40mm Ball

E. 1 Piece. 530mm long bead string--(10mm bead*35pcs)

MARNING:This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov






LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #DEL90806AG

Part Number

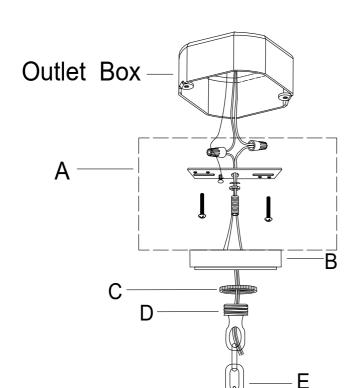

Part Numbers-For Hanging

A. (1)-Mounting hardware

Wire Connector x 2.

Mounting bar x 1.

Lock washer x 1.

Hex nut x 1.

Mounting screw x 2.

Thread Nipple x 1.

B. (1)-Canopy (W5"xH1 1/4") -XSN90803AGCAN5.11IN

C. (1)-Collar Ring

D. (1)-Collar Loop

E. (1)-Chain (4mmx72") -XSN90803AGCHA4MM

F. (1)-Fixture Loop

G. (1)-Check Ring

H. (1)-Frame


I. (1)-Distributor Box

J. (1)-Center Finial

K. (6)-Crystal Bobeche ; Ø2 3/8",H3/8"; 23mm center hole.

-XSN90802BOB2.4IN

L. (6)-Candle Sleeve; Ø 7/8", H4 1/8" -XSN90806AGCDL4.13IN

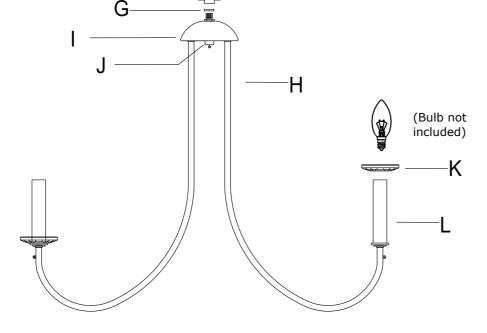

F