



ASSEMBLY INSTRUCTION MODEL#SLO-A3601-VG-BF



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.







You will need 1- Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

How to install

- 1. Install the mounting plate to the outlet box using two outlet box screws.
- 2. Install backplate onto the mounting plate, and secure with the screws.
- 3. Thread the tail into the bottom of socket.
- 4. Install the fabric shade onto the candle sleeve.
- $5.\ \mbox{Install}$ the bulb(not included) into socket.

SIDE VIEW FRONT VIEW

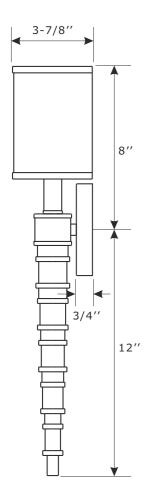

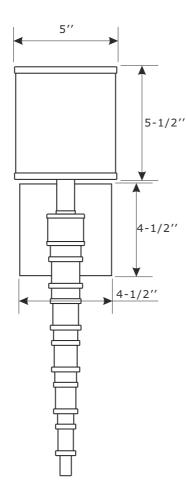






ASSEMBLY INSTRUCTION MODEL#SLO-A3601-VG-BF

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Mounting plate
- C. (1)-Backplate L4-1/2"xW4-1/2"xH3/4" #XRF3601VGBFBKP4.5IN
- E. (1)-Tail #XRF3601VGBFTAIL
- F. (1)-Candle sleeve W7/8"xH2-3/4" #XRF3601VGBFCDL2.75IN
- G. (1)-Fabric shade #XRF3601VGSHA5IN

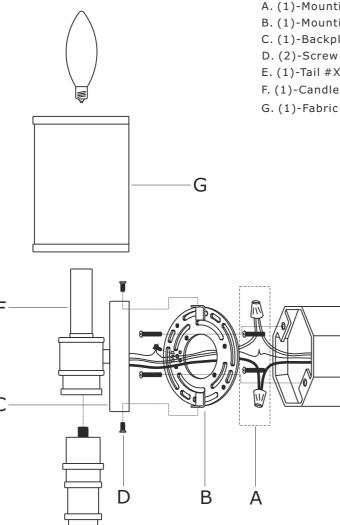

Ε