




ASSEMBLY INSTRUCTION MODEL#NIL-70014-BFMG



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 4- Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

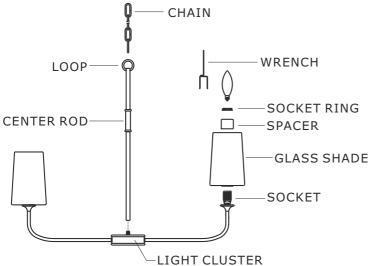

How to install

- 1. Slip the center rod assembly along wire and thread onto the nipple located on the top of the light cluster.
- 2. Determine the preferred hanging height and adjust to the chain required.
- 3. Install the fixture onto outlet box.
- 4. Install the glass shade and spacer over the socket, and secure with the socket ring by wrench.
- 5. Install the bulb(not included) into the socket .

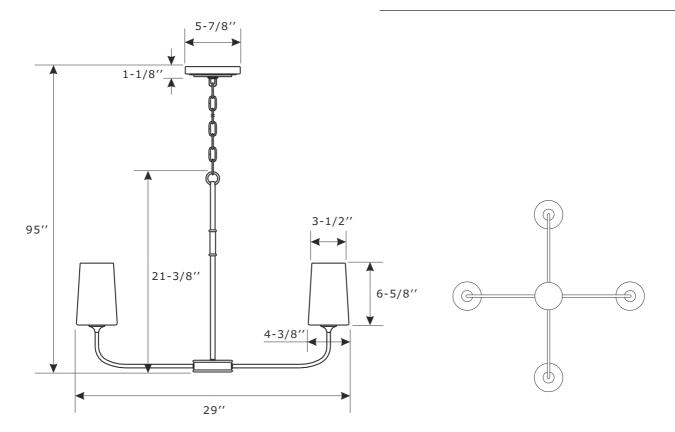





ASSEMBLY INSTRUCTION MODEL#NIL-70014-BFMG

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5-7/8"xH1-1/8" #XRF70014BFMGCAN5.8IN
- C. (1)-Collar ring
- D. (1)-Collar loop
- E. (1)-Chain -72", 4mm thick #XRF70014BFMGCHA4MM
- F. (1)-Top stem with loop L6-1/4" #XRF70014BFMGTOSTEM6.25IN
- G. (1)-Center stem L2-3/4" #XRF70014BFMGCESTEM2.75IN
- H. (1)-Bottom stem L11" #XRF70014BFMGBOSTEM11IN
- I. (1)-Wrench
- J. (4)-Socket ring
- K. (4)-Spacer
- L. (4)-Glass shade #XRF70012BFMGGLA6.6IN
- M. (4)-Socket

