

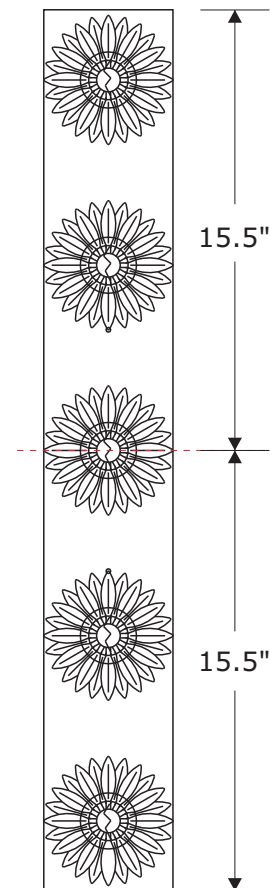



CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #508-GA-SA

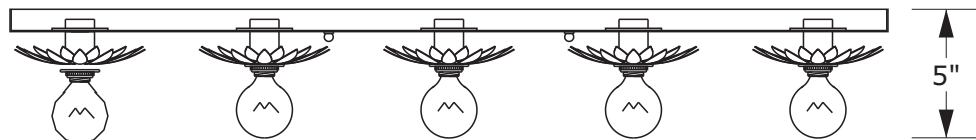

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



REQUIRED G16-1/2"


You will need 5 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to install

1. Install the backplate onto the outlet box, and secure it with the ball nuts. (The leaves can be adjusted forward and backward to achieve the depth you prefer.)
2. Unscrew the socket ring from the socket, then put the metal leaf on the socket, and secure the socket ring back to the socket.
3. Insert recommended bulb (not included).
4. The fixture can be mounted either horizontally and vertically.


 **WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #508-GA-SA

Part Number

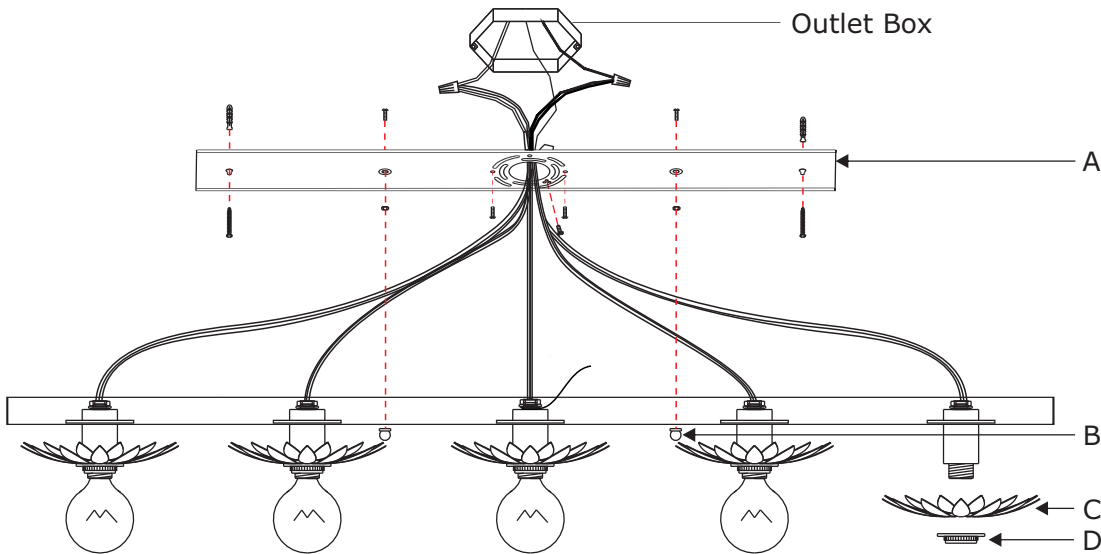

A. (1) - Mounting Hardware
Includes:

- (1) - Mounting Plate
- (2) - Wall Anchors
- (2) - Anchor Screws
- (2) - Machine Screws
- (3) - Wire Nuts

B. (2) - Ball Nut #XRE508GASABANUT

C. (5) - Leaf Assembly

D. (5) - Socket Ring

How to install the mounting plate:

1. Put the mounting plate over the outlet box and mark the two points on the wall at the center of key holes.
2. Drill the holes at the marked points and insert the wall anchor inside the hole drilled.
3. Place the mounting plate over the outlet box and secure it with the machine screws, insert the wall anchor screws inside the wall anchors in the wall and tighten it.