




CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #526-SA

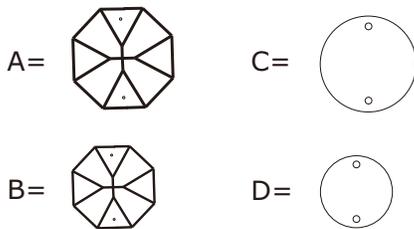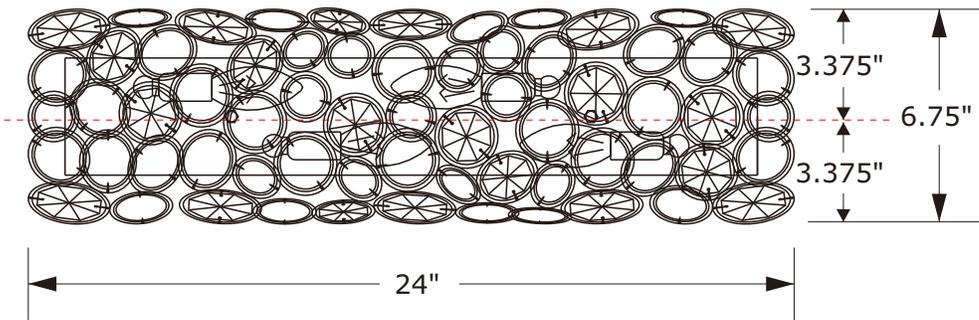

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4-Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED.

How to install the mounting plate
1. Put the mounting plate over the outlet box and mark two points on the wall at the center of key holes.
2. Drill the holes at the marked points and insert the wall anchor inside the hole drilled.
3. Place the mounting plate over the outlet box and secure it with the machine screws. Insert the wall anchor screws inside the wall anchors in the wall and tighten it.

How to install
1. Remove the frame by unscrewing the nuts on top of the backplate.
2. Insert recommended bulbs (not included).
3. Secure the frame by screwing the nuts.

Crystal Sets
A. 10 Pieces
50mm
B. 11 Pieces
40mm

Capiz Shell Sets
C. 31 Pieces
40mm
D. 18 Pieces
30mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

PART NUMBER MODEL #526-SA

Part Number

- A. (1) - Mounting Hardware
 - Includes:
 - (1) - Mounting Plate
 - (2) - Wall Anchors
 - (2) - Anchor Screws
 - (2) - Machine Screws
 - (3) - Wire Nuts
- B. (2) - Ball Nut1
- C. (2) - Hex Nut
- D. (1) - Backplate(L22.91",H4.72",D0.79")
#XRE526SABKP22.91IN
- E. (2) - Ball Nut2
- F. (1) - Frame

